







| Parts List | | | | |
|------------|-----|-------------|-----------------------------|--|
| ITEM | QTY | PART NUMBER | DESCRIPTION | |
| 1 | 1 | F060621 | LAKOAV11 | |
| 2 | 1 | F051601 | P16 PLASTIC TERM. PROTECTOR | |
| 3 | 1 | F050424 | 24V AC/DC LED YELLOW | |
| 4 | 1 | F051702 | 25MM RING | |
| 5 | 1 | F061256 | 25MM YELLOW LENS | |

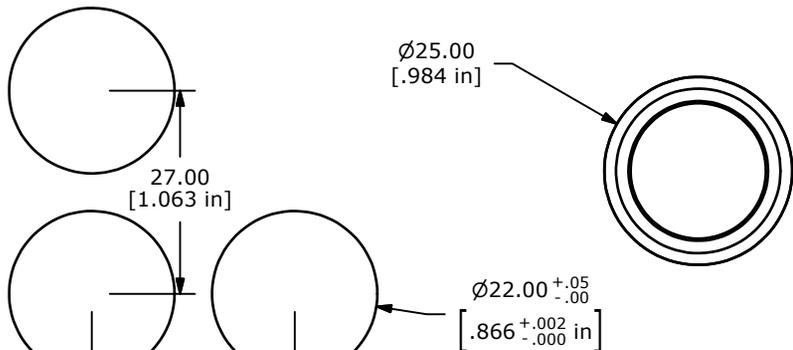

RECOMMEND PANEL MOUNTING



CONTACT CONFIGURATION

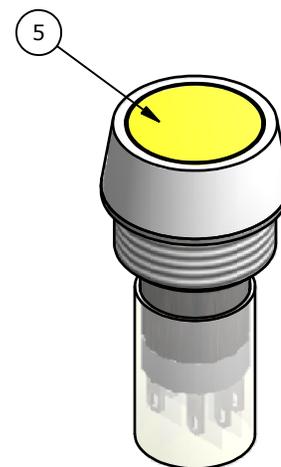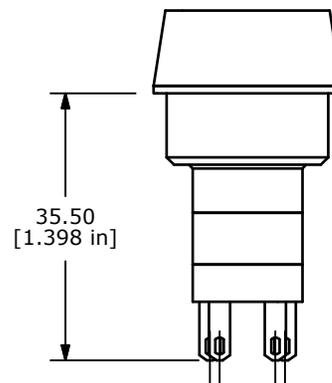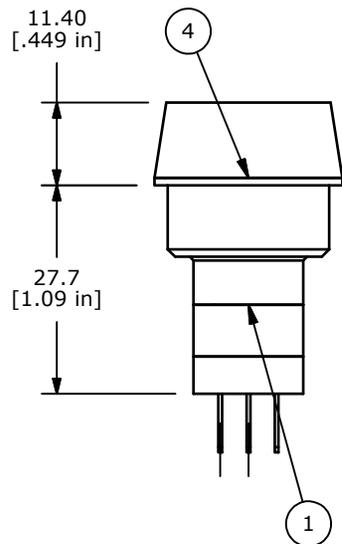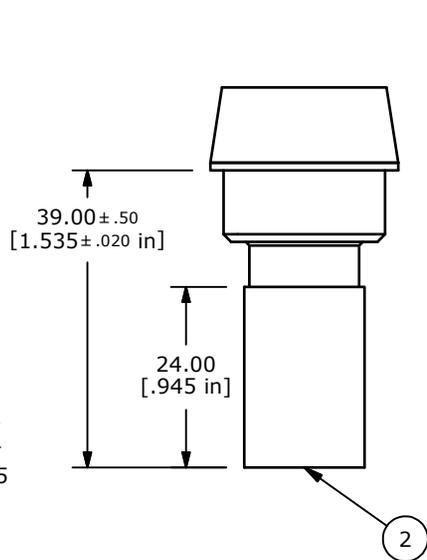

ISOMETRIC

NOTES:
 1. ALL DIMENSIONS IN MM [INCH].
 2. GENERAL TOLERANCE: 0.0±0.4
 0.00±0.25

- 3. TERM. NOS. FOR REF. ONLY.
- 4. RATING: 5A @250VAC
 8A @125VAC
 .2A @250VDC
 6A @24VDC
- 5. ELECTRIC LIFE: 50,000 MAKE-OR-BREAK CYCLES AT FULL LOAD.
- 6. INSULATION: 1,000 MΩ MIN.
- 7. DIELECTRIC STRENGTH: 1,500V FOR 1 MIN
- 8. OPERATING TEMP: -25°C TO 55°C
- 9. LENS COLOR: YELLOW
- 10. LAMP VOLTAGE: 24V AC or DC
- 11. PANEL THICKNESS: 4 mm MAX.
- 12. DEGREE OF PROTECTION: IP65
- 11. 2002/95/EC (ROHS) COMPLIANT



TITLE LAKOAV11KYELYEL

| | | | | |
|-----|--------|-------------------------|---------|-----|
| A | 19693 | RELEASED FOR PRODUCTION | 2/22/11 | BGL |
| REV | PCR NO | DESCRIPTION | DATE | BY |

| | | | | |
|-------|------------|-----|---------|-----|
| SCALE | DATE | DR | DWG | REV |
| 1:1 | 10/20/2006 | BGL | XF0836P | A |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED